

UNI CarTalk

The most popular and most purchased base unit from the **UNI System 8** range of hands-free car kits













For more than 250 mobile phones from leading manufacturers



Perfect voice output – thanks to the filtering out of driving noises and the use of vehicle's sound system



Automatic radio-mute function when calling



Connectivity option for an external antenna – enables optimum transmitting and reception performance¹




Charging function thanks to cradles¹



Patented: quick and easy snap-in mounting of the connecting units¹

separately available

UNI System 8

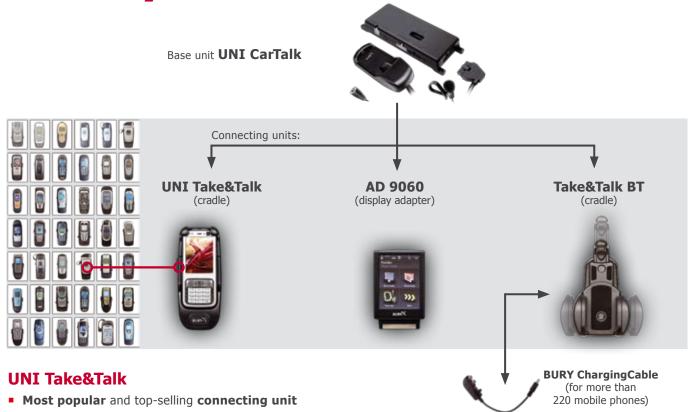

-		-			
^	•		•	•	

 DialogPlus voice control – extremely accurate, rapid reaction word recognition without voice training and with visual and acoustic user support

 Mobile phone specific cradle with charging function Phone is inserted and removed rapidly and easily When changing the mobile, no need to exchange

 Magic word – activation of the voice control with a single voice command

the hands-free car kit completely

- **Multipoint-function** simultaneous connection of two mobile phones to the system is possible
- **Voice memo function** record telephone calls and leave behind instructions for other drivers
- Text-to-speech¹ reads out text messages and phone book entries aloud

Take&Talk BT

- Universal, adjustable cradle, also for flip/slide mobile phones
- Bluetooth® connection between mobile phone
- Access to voice tags stored on mobile phone¹
- When changing the mobile, no need to exchange the hands-free car kit completely
- Mobile phone specific charging cables² compensate for rapid battery discharging during a call

¹The scope of the functions may vary according to mobile phone, network provider and software version. ²Accessories

Technical details – UNI CarTalk				
External dimensions hang-up cup	113 x 53 x 27 mm			
External dimensions electronic box	153,1 x 58 x 22,4 mm			
Operating voltage	10 V - 16 V			
Quiescent current	max. 1 mA by $U = 13,5 V$			
Working current	approx. 500 mA in standby modus max. 1,5 A in active call			
Temperature range	-40°C to +50°C			
Fuse protection	2 A			

Accreditations



The base unit complies with the EU "Electromagnetic Compatibility" directive 2004/108/EC.



Type approval pursuant to guideline 72/245/EEC with all amendments up to and including 2006/28/EC "Electromagnetic Compatibility in Motor Vehicles".

Scope of delivery - UNI CarTalk

- 1. BURY BasePlate for connecting units with external antenna tap
- 2. Flectronic box
- 3. External microphone for optimum sound quality
- 4. Optional: Loudspeaker, antenna, switch box AC 5120



Subject to alterations and errors excepted. All of the brands and/or brand names stated here are owned by the corresponding legal rights owners